

**CAP TYPE STORZ "THREADED" FOR FIRE VALVE BRONZE DIN
PN 16**

Material

Pressure

bronze CC491K; DIN RG5

PN 16

TECHNICAL DESCRIPTION

Bronze cap for fire hose coupling – Storz type

WORKING FLUID / MEDIUM

- Sea water
- Fresh water


ANNEX

- In fire systems
- Maximum operating temperature 80 °C

JOIN

- Standard for Storz coupling

Dimensions: G 1" - 4"

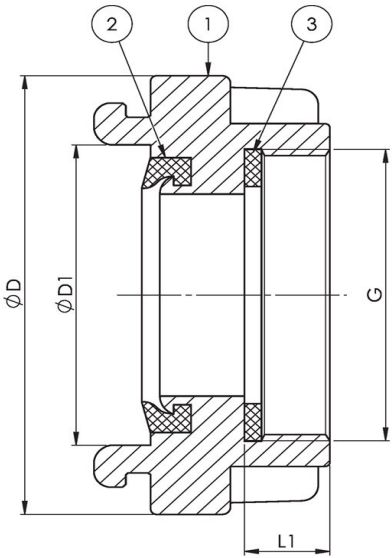

No.	DETAILS	MATERIALS	SPECIFICATION	
1	Coupling	bronze CC491K (RG5)	Standard	DIN
2	Sealant	NBR rubber	Coupling-type	Storz
3	Sealant	NBR rubber	Joining	thread

CAP TYPE STORZ "THREADED" FOR FIRE VALVE BRONZE DIN Material bronze CC491K; DIN RG5
PN 16 Pressure PN 16

G	D	D1	L1	Type	kg
G1"	55	31	17	D-25	0.2
G1"	98	66	17	C-52	0.7
G 1 1/4"	98	66	17	C-52	0.7
G 1 1/2"	98	66	19	C-52	0.7
G 2"	98	66	19	C-52	0.6
G 2 1/2"	98	66	21	C-52	0.8
G 2"	118	81	19	65	1
G 2 1/2"	118	81	21	65	1
G 2 1/2"	126	89	21	B-75	1.1
G 4"	155	115	23	100	1.8
G 4"	182	133	23	A 100	3.2