

FIRE VALVE STRAIGHT BRONZE FLANGE DIN PN 16

Material bronze CC491K; DIN RG5
Pressure PN 16

TECHNICAL DESCRIPTION

Fire valve straight, bronze with soft sealing.
Used in fire systems operating with fresh and sea water,
installed in a set with a Storz type fire hose coupling.

WORKING FLUID / MEDIUM


- Sea water
- Fresh water

ANNEX

- In fire systems

Maximum operating temperature 80 °C Connection -
Standard for hose with Storz coupling

Dimensions: DN-40-65

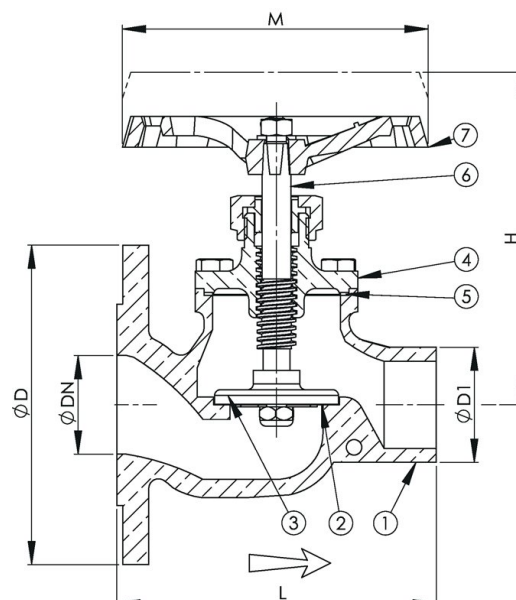

No.	DETAILS	MATERIALS
1	Body	bronze CC491K (RG5)
2	Bracelet solid.	NBR rubber
3	Valve	brass CW710R (SoMs59)
4	Lid	bronze CC491K (RG5)
5	Garnish	rubber-reinforced
6	Spindle	brass CW710R (SoMs59)
7	Handwheel	bronze CC491K (RG5)

SPECIFICATION	
Standard	DIN
Execution	straight
Joining	flanged
Management	manual / manual with wheel
Drive	multi-turn
T max. °C	NBR seat 80°C / EPDM seat 110°C

FIRE VALVE STRAIGHT BRONZE FLANGE DIN PN 16

Material bronze CC491K; DIN RG5

Pressure PN 16

DN	PN	Flanges	L	D	D1	H	M	Weight (kg)
40	16	PN 16	150	72	G 1 1/2"	160	140	5
50	16	PN 16	167	165	G 2"	175	140	6
65	16	PN 16	200	185	G 2 1/2"	205	160	11