

FIRE VALVE STRAIGHT BRONZE FLANGE JIS F7334 10K

Material bronze CC491K; DIN RG5
Pressure 10K

TECHNICAL DESCRIPTION

Straight fire hydrant with soft seal JIS F7334 10K

It is installed in fire systems operating with fresh and sea water, it is installed in a set with a „NAKAJIMA“ type fire hose coupling. With threaded cover.

WORKING FLUID / MEDIUM

- Sea water
- Fresh water


ANNEX

- In fire systems with a maximum operating temperature of 80 °C

JOIN

- Standard NAKAJIMA coupling or BSPP male thread

Dimensions: DN 15 - 65

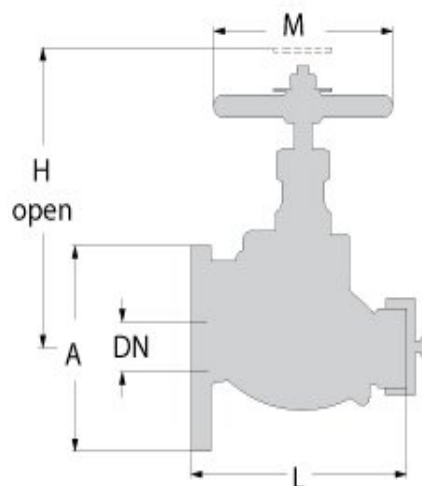

No.	DETAILS	MATERIALS	SPECIFICATION	
			Standard	JIS 7334R
1	Body	bronze CC491K (RG5)	Execution	straight
2	Bracelet solid.	rubber-reinforced	Joining	flanged
3	Valve	bronze CC491K (RG5)	Management	manually with wheel
4	Lid	bronze CC491K (RG5)	Drive	multi-turn
5	Spindle	brass CW710R (SoMs59)	T max. °C	NBR seat 80 °C / EPDM seat 110 °C
6	Handwheel	gray cast iron EN-JL1030		

FIRE VALVE STRAIGHT BRONZE FLANGE JIS F7334 10K

Material bronze CC491K; DIN RG5

Pressure 10K

DN	A	L	H (open)	M
15	95	115	130	80
25	125	135	160	125
40	140	175	190	140
50	155	220	255/270	160
65	175	275	295	200