

FIRE VALVE STRAIGHT BRONZE FLANGE JIS F7334 5K

Material bronze CC491K; DIN RG5
Pressure 5K

TECHNICAL DESCRIPTION

Straight fire hydrant with soft seal JIS F7334 5K

It is installed in fire systems operating with fresh and sea water, it is installed in a set with a „NAKAJIMA“ type fire hose coupling. With threaded cover.

WORKING FLUID / MEDIUM

- Sea water
- Fresh water


ANNEX

- In fire systems with a maximum operating temperature of 80 °C

JOIN

- Standard NAKAJIMA coupling or BSPP male thread

Dimensions: DN 15 - 65

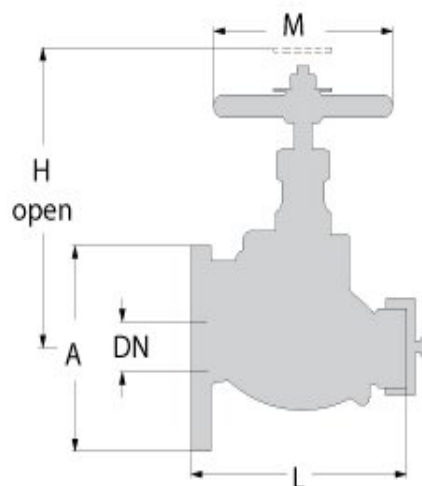

No.	DETAILS	MATERIALS	SPECIFICATION	
1	Body	bronze CC491K (RG5)	Standard	JIS 7334R
2	Bracelet solid.	rubber-reinforced	Execution	straight
3	Valve	bronze CC491K (RG5)	Joining	flanged
4	Lid	bronze CC491K (RG5)	Management	manually with wheel
5	Spindle	brass CW710R (SoMs59)	Drive	multi-turn
6	Handwheel	gray cast iron EN-JL1030	T max. °C	NBR seat 80 °C / EPDM seat 110 °C

FIRE VALVE STRAIGHT BRONZE FLANGE JIS F7334 5K

Material bronze CC491K; DIN RG5
Pressure 5K

DN	A	L	H (open)	M
15	80	110	130	80
25	95	125	160	125
40	120	160	190	140
50	130	210	255/270	160
65	-	-	295	200