

FIRE VALVE ANGLE BRONZE FLANGED JIS F7334H 10K

Material bronze CC491K; DIN RG5
Pressure 10K

TECHNICAL DESCRIPTION

Angled fire hydrant with soft seal JIS F7334H 10K
It is installed in fire systems operating with fresh and sea water, it is installed in a set with a coupling for a fire hose type „NAKAJIMA“. With a threaded cover.

WORKING FLUID / MEDIUM

- Sea water
- Fresh water


ANNEX

- In fire systems with a maximum operating temperature of 80 °C

JOIN

- Standard NAKAJIMA coupling or BSPP male thread

Dimensions: DN 15 - 65

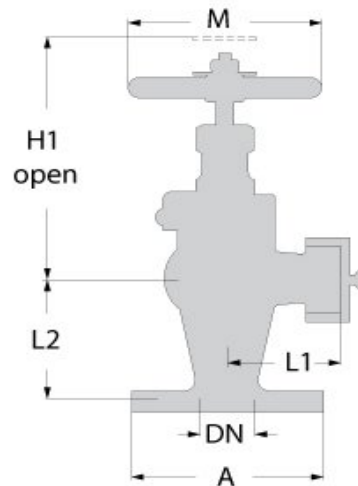

No.	DETAILS	MATERIALS	SPECIFICATION	
1	Body	bronze CC491K (RG5)	Standard	JIS 7334H
2	Bracelet solid.	rubber-reinforced	Execution	straight
3	Valve	bronze CC491K (RG5)	Joining	flanged
4	Lid	bronze CC491K (RG5)	Management	manually with wheel
5	Spindle	brass CW710R (SoMs59)	Drive	multi-turn
6	Handwheel	gray cast iron EN-JL1030	T max. °C	NBR seat 80 °C / EPDM seat 110 °C

FIRE VALVE ANGLE BRONZE FLANGED JIS F7334H 10K

Material bronze CC491K; DIN RG5

Pressure 10K

DN	A	L	H (open)	M
15	95	55	120	80
25	125	65	145	125
40	140	75	165	140
50	155	105	255/240	160
65	175	120	255	200