

BRONZE ANGLE VALVE JIS F7304 16K

Material bronze CC491K; DIN RG5
Pressure 16 K

TECHNICAL DESCRIPTION

Angle valve with flange connection. Possible variations of the function depending on the design.

- shut-off valve
- regulating valve
- check valve

Valve seat sealing - metal to metal

Spindle type - pull-out


WORKING FLUID / MEDIUM

- Water, steam, fuels, lubricating and flammable hydraulic oils, oil, air, non-flammable hydraulic fluids, boiler feed water, condensate. For thermal oil, the use of bellows valves is recommended
- Sea water

OPTIONS

- Spring for check valve

Dimensions: DN 15 - 65

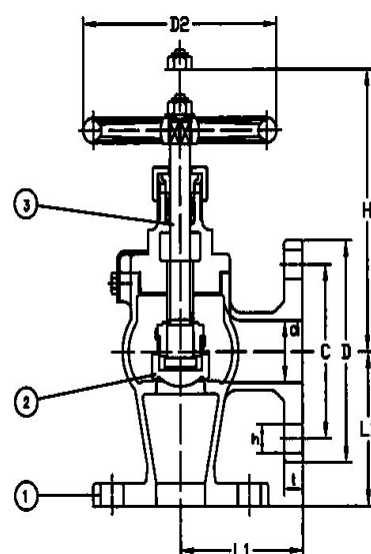

			SPECIFICATION	
No.	DETAILS	MATERIALS	Standard	JIS
1	Body / Lid	bronze CC491K	Joining	JIS B2220 16K
2	Saddle	bronze CC491K	Construction length	JIS B2002
3	Valve	bronze CC491K	Lid connection	threaded
	Spindle	brass	Execution	angular
	Handwheel	gray cast iron (GG25)	Joining	flanged
	Spindle seal	Seal/Gasket seal	Management	manual with wheel / Rising stem
			Drive	multi-turn
			T max. °C at 5 Bar	205 °C
			T max. °C at 7 Bar	120 °C

BRONZE ANGLE VALVE JIS F7304 16K

Material bronze CC491K; DIN RG5

Pressure 16 K

DN	PN	Flanges/PN	L1	D	C	nx Øh	H (open)	D2	Weight (kg)
15	16K	16K	70	95	70	4x15	130	80	2.73
20	16K	16K	75	100	75	4x15	140	100	3.65
25	16K	16K	85	125	90	4x19	160	125	5.16
32	16K	16K	95	135	100	4x19	170	125	6.72
40	16K	16K	100	140	105	4x19	190	140	8.13