

BRONZE VALVE "HOSE VALVE" ANGLE JIS F7334 5K

Material bronze CC491K; DIN RG5

Pressure 5 K

TECHNICAL DESCRIPTION

Bronze angle valve with flange connection, type „HOSE VALVE“ according to JIS F7334 5K. Possible variations of the function depending on the design.

- shut-off valve


Valve seat sealing - metal to metal

Spindle type - pull-out

APPLICATION / WORKING FLUID

- Fire systems, deck air and wash systems
- Seawater

Dimensions: DN 15 - 50

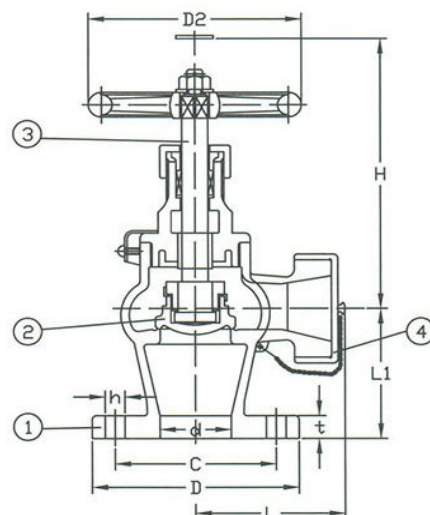

No.	DETAILS	MATERIALS
1	Body / Lid	bronze CC491K (RG5)
2	Seat/valve	bronze CC491K (RG5)
3	Spindle	bronze CC491K (RG5)
	Handwheel	gray cast iron (GG25)
	Spindle seal	graphite gasket
4	Cap	bronze CC491K (RG5)

SPECIFICATION	
Standard	JIS
Joining	JIS B2220 5K
Construction length	JIS B2002
Lid connection	threaded
Execution	angular
Joining	flanged
Management	manually with flywheel
Drive	multi-turn
T max. °C at 5 Bar	205 °C
T max. °C at 7 Bar	120 °C

BRONZE VALVE "HOSE VALVE" ANGLE JIS F7334 5K

Material bronze CC491K; DIN RG5

Pressure 5 K

DN	PN	Flanges/PN	L1	D	C	nx Øh	H (open)	D2	Weight (kg)
15	5K	5K	55	80	60	4x12	120	80	1.98
20	5K	5K	60	85	65	4x12	130	100	2.73
25	5K	5K	65	95	75	4x12	145	125	3.44
32	5K	5K	80	115	90	4x15	150	125	4.77
40	5K	5K	85	120	95	4x15	165	140	5.99
50	5K	5K	100	130	105	4x15	-	140	10.1
65	5K	5K	115	155	130	4x15	-	160	15.6