

FIRE VALVE STRAIGHT BRONZE ACCORDING TO JIS F7334 R WITH "NAKADJIMA" CONNECTION, 10K

Material bronze CC491K; DIN RG5
Pressure 10 K

TECHNICAL DESCRIPTION


Straight bronze fire valve with flange connection, according to JIS F7334R 10K and fire hose coupling „NAKADJIMA“. Possible variations of the function depending on the design.

- Fire stop valve

Valve seat seal – metal in rubber
Spindle type – pull-out

APPLICATION / WORKING FLUID

- Fire systems
- Seawater

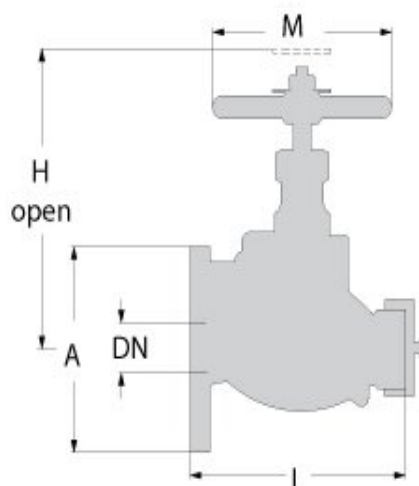

Dimensions: DN 15 - 65

No.	DETAILS	MATERIALS	SPECIFICATION	
	Body / cover	bronze CC491K (RG5)	Standard:	JIS 7334R
	Seat/valve	bronze CC491K (RG5)	Execution:	straight
	Spindle	bronze CC491K (RG5)	Joining:	flanged
	Handwheel	gray cast iron (GG25)	Drive:	manually
	Spindle seal	graphite gasket	T max on the saddle:	seat rubber NBR - 80 °C / seat rubber EPDM - 110 °C
	Cap	bronze CC491K (RG5)		

**FIRE VALVE STRAIGHT BRONZE ACCORDING TO JIS F7334 R
WITH "NAKADJIMA" CONNECTION, 10K**

Material bronze CC491K; DIN RG5
Pressure 10 K

DN	A	L	H (open)	M
15	95	115	130	80
25	125	135	160	125
40	140	175	190	140
50	155	220	255/270	160
65	175	275	295	200