

INDUSTRIAL THERMOSTAT - MARINE VERSION WITH
PROTECTED CAPILLARY TUBE

Material plastic / brass / stainless steel
Pressure PN 16


THERMOSTATS FROM THE KPS SERIES.

Special attention is paid to the KPS series thermostats to meet the requirements for high reliability, robust, compact design and resistance to shock and vibration. They are available with all relevant approvals for use in both onshore and offshore environments.

WORKING MEDIUM / FLUID
Oils, air, gas, water, etc.

EXECUTION

According to the size chart.

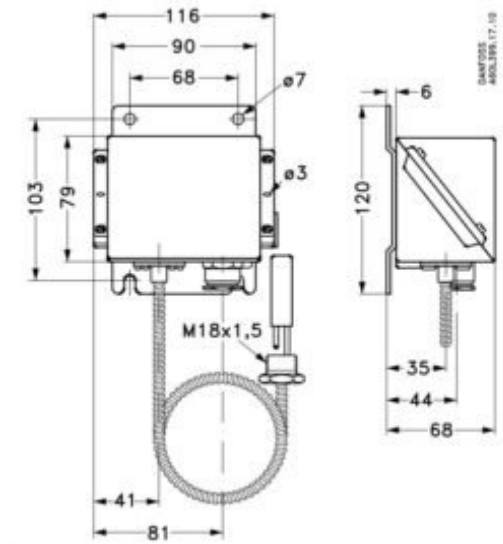

SPECIFICATION		
1	Body	PVC box
2	Interior details	carbon steel
		brass / copper
3	Capillary tube	reinforced capillary tube
Standard		DIN
T max. of the medium		70 °C
T min. of the middle		-10 °C
Weight		1.40 kg
Adjustment range		according to the size chart

**INDUSTRIAL THERMOSTAT - MARINE VERSION WITH
PROTECTED CAPILLARY TUBE**

Material plastic / brass / stainless steel
Pressure PN 16

SIZE	MODEL	TEMPERATURE RANGE (°C)	IP
G 1/2"	KPS 79	50.0 ÷ 100.0	67
G 1/2"	KPS 81	60.0 ÷ 150.0	67