

CONDENSATE TRAPPER WITH INVERTED PISTON ADCA IB35S Material stainless steel 1.4408; steel 1.0460
/ IB35SS Pressure PN 40

TECHNICAL DESCRIPTION

The IB30 series of steam traps are of inverted piston design and are recommended for use in systems where continuous efficient and trouble-free operation is required. They do not stop performing their functions, even with the passage fully open or closed, which makes them suitable for use at medium and high steam pressures. The connection is threaded or flanged.

WORKING FLUID / MEDIUM

- saturated steam

EXECUTION

- threaded ISO7/1 Rp (BS21)
- flanged EN 1092-1 PN40 or ANSI


INSTALLATION INSTRUCTIONS

- In a horizontal position.

MAIN ADVANTAGES

- Controlled discharge.
- Drains condensate at a temperature close to that of steam.
- Not affected by hydraulic shocks and vibrations in the system.
- Easy to maintain.

Dimensions: DN 15 - 25

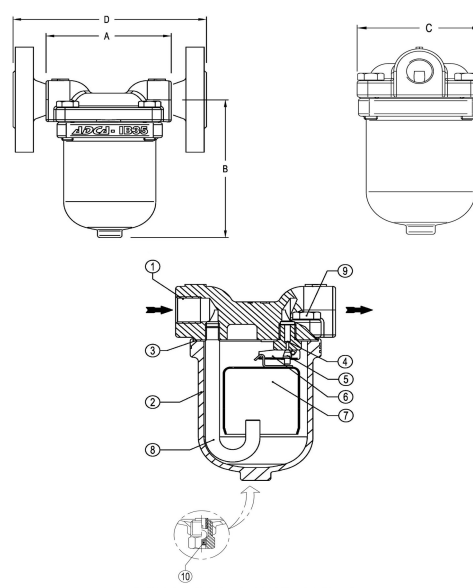

CONDENSATE TRAPPER WITH INVERTED PISTON ADCA IB35S Material stainless steel 1.4408; steel 1.0460
/ IB35SS Pressure PN 40

No.	DETAILS	MATERIALS	MATERIALS IB	SPECIFICATION	
		IB35S	35 SS		
1	Body	P250GH/1.0460	CF8M / 1.4408	Standard	DIN/ANSI
2	Lid	CF8M / 1.4408	CF8M / 1.4408	Joining	threaded BSP / flanged EN 1092-1 or ANSI
3	Garnish	graphite	graphite	Lid connection	threaded
4	Saddle	Seat AISI 410 / 1.4006	Seat AISI 410 / 1.4006	Execution	straight
5	Valve	Seat AISI 410 / 1.4006	Seat AISI 410 / 1.4006	Management	automatically
6	Shoulder	AISI 304 / 1.4301	AISI 304 / 1.4301	Air vent	automatically
7	Piston	AISI 304 / 1.4301	AISI 304 / 1.4301	Installation	horizontal position
8	Inlet pipe	AISI 304 / 1.4301	AISI 304 / 1.4301	MAXIMUM DIFFERENTIAL PRESSURES	
9	Bolts	A2 - 70	A2 - 70	IB35S-17 - IB35SS-17	17 bar
10	Anti-icing device	AISI 304 / 1.4301	AISI 304 / 1.4301	IB35S-27 - IB35SS-27	27 bar

CONDENSATE TRAPPER WITH INVERTED PISTON ADCA IB35S Material stainless steel 1.4408; steel 1.0460
/ IB35SS Pressure PN 40

DIMENSIONS (mm) IB35S										
threaded and flanged					EN PN 16 / 40		ANSI 150		ANSI 300	
DN	A	B	C	kg	D	kg	D	kg	D	kg
15 - 1/2"	110	125	92	2.3	170	3.8	170	3.3	170	4.1
20 - 3/4"	110	125	92	2.3	170	4.3	170	3.7	170	5.3
25 - 1"	160	125	92	2.3	180	4.9	180	4.5	180	6.5
DIMENSIONS (mm) IB35SS										
threaded and flanged					EN PN 16 / 40		ANSI 150		ANSI 300	
DN	A	B	C	kg	D	kg	D	kg	D	kg
15 - 1/2"	110	125	92	2.3	170	3.8	170	3.3	170	4.1
20 - 3/4"	110	125	92	2.3	170	4.3	170	3.7	170	5.3
25 - 1"	160	125	92	2.3	180	4.9	180	4.5	180	6.5