

THREE-WAY STEEL PRESSURE GAUGE VALVE PN 400

Material steel 1.0619 / forged
Pressure PN 400


APPLICATIONS

Three-way pressure gauge needle valve. It is used as a shut-off valve installed before a manometer, its purpose is to ensure repair or replacement of the manometer without having to stop the system. A threaded hole is made in the lower part of the valve, which can be used as a test connection if necessary.

VARIANTS

Thread connection: Male/Female

Connection thread: G1/2"; M20x1.5

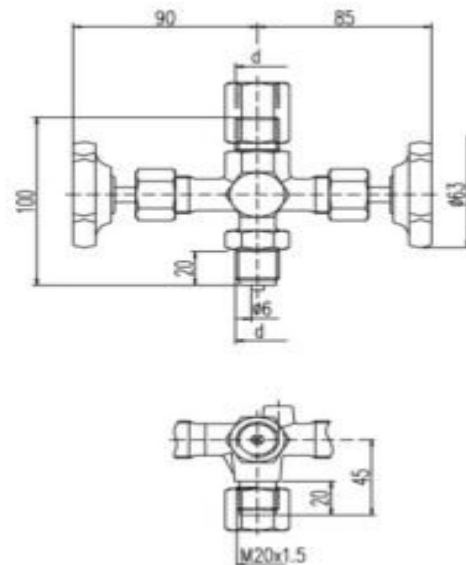

No.	DETAILS	MATERIALS
1	Body	steel 1.0619 / forged
2	Packing seal	Teflon / PTFE
3	Spindle	stainless steel 1.4104 / AISI 316L
4	Drive wheel	plastic
5	Clamping sleeve	steel 1.0619

SPECIFICATION	
Standard	DIN
P max. working pressure	400 Bar
T max operating temperature	200 °C
Management	manually manually with wheel
Weight	0.510 kg
Inlet	1/2" (BSPP)
	M20 x 1.5
Outlet	1/2" (BSPP)
	M20 x 1.5

THREE-WAY STEEL PRESSURE GAUGE VALVE PN 400

Material steel 1.0619 / forged
 Pressure PN 400

DN	accession	working pressure (Bars)	(kg)
4	BSPP G1/2"	0-400	0.490
4	M20x1.5	0-400	0.490