

**CONDENSATE TRAP WITH AIR BREATHER ADCA TSS 22
THREADED**

Material stainless steel AISI304 / 1.4301
Pressure PN 40

TECHNICAL DESCRIPTION

The stainless steel thermostatic steam traps with air vent - TSS22 are specially designed for use in industrial equipment such as autoclaves, sterilizers, equipment for the food and chemical industries. Their small size makes them preferred for installation in such equipment. The connection is threaded.

WORKING FLUID / MEDIUM

- Saturated steam

EXECUTION

- thread: ISO7/1 Rp (BS21)


INSTALLATION INSTRUCTIONS

- In horizontal or vertical position.

MAIN ADVANTAGES

- Controlled discharge.
- Drains condensate at a temperature close to that of the steam.
- Thermostat for different subcoolings (5°K to 30°K).
- Excellent deaeration.
- Operates with moderately superheated steam.
- Simple and compact design.

Dimensions: 1/4" - 1"

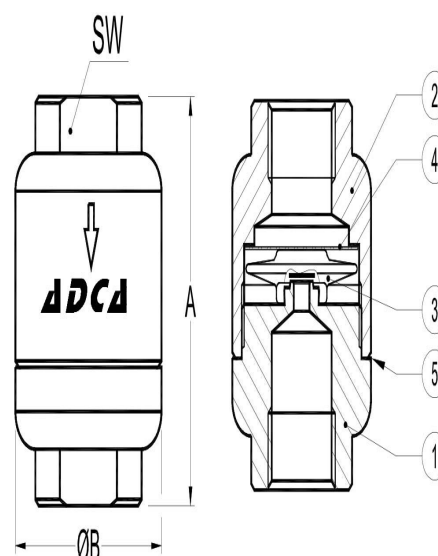

			SPECIFICATION	
No.	POSITION	MATERIAL	Standard	DIN
1	Body	AISI304 / 1.4301	Joining	threaded BSP
2	Lid	AISI304 / 1.4301	Lid connection	threaded
3	Thermostatic element	stainless steel / graphite	Execution	straight
4	Filter	AISI304 / 1.4301	Management	automatically
5	Instructional set	stainless steel / graphite	Venting	automatically
			Installation	horizontal or vertical

**CONDENSATE TRAP WITH AIR BREATHER ADCA TSS 22
THREADED**

Material stainless steel AISI304 / 1.4301
Pressure PN 40

DIMENSIONS (mm)				
DN	A	B	SW	kg
1/4"	65	44	27	0.5
3/8"	65	44	27	0.5
1/2"	65	44	27	0.45
3/4"	65	44	36	0.47
1"	65	44	40	0.4