

FIRE VALVE ANGLE FLANGE DIN PN 16

Material bronze CC491K; DIN RG5
Pressure PN 16

TECHNICAL DESCRIPTION

Fire valve, angle, bronze with soft sealing.
Used in fire systems operating with fresh and sea water,
installed in a set with a Storz type fire hose coupling.


WORKING FLUID / MEDIUM

- Sea water

ANNEX

- In fire systems

Maximum operating temperature 80 °C Connection -
Standard for hose with Storz coupling

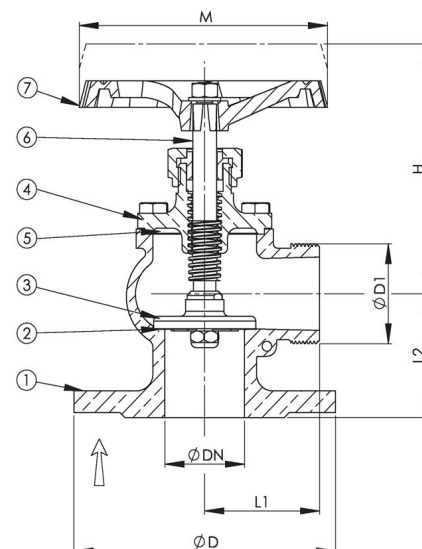

Dimensions: DN-40-65

No.	DETAILS	MATERIALS	SPECIFICATION	
1	Body	bronze CC491K (RG5)	Standard	DIN
2	Bracelet solid.	NBR rubber	Execution	angled 90°
3	Valve	brass CW710R (SoMs59)	Joining	flanged
4	Lid	bronze CC491K (RG5)	Management	Manual / manual with wheel
5	Garnish	rubber-reinforced	Drive	multi-turn
6	Spindle	brass CW710R (SoMs59)	T max. °C	NBR seat max. 80°C / EPDM seat 110°C
7	Handwheel	bronze CC491K (RG5)		

FIRE VALVE ANGLE FLANGE DIN PN 16

Material bronze CC491K; DIN RG5
 Pressure PN 16

DN	PN	Flanges/PN	D	D1	L1	L2	H	M	Weight (kg)
40	16	PN 16	150	G 1 1/2"	65	70	150	140	4.3
50	16	PN 16	165	G 2"	73	75	150	140	5.3
65	16	PN 16	185	G 2 1/2"	95	90	165	160	9.5