

CHECK VALVE - STOP STRAIGHT BRONZE WITH WELDED
RINGS CRS-RG-N; S / DIN86512 PN 40

Material bronze CC491K; DIN RG5 / forged
Pressure PN 40


TECHNICAL DESCRIPTION

They are used to transport water - hot and cold, oils, steam, neutral gases, seawater, fuels, air, etc.

IMPLEMENTATION AND OPTIONS

- according to DIN 86512-CRS-RG-S
- body with internal parts made of stainless steel or bronze
- other materials on request

Dimensions: DN 6 - 32

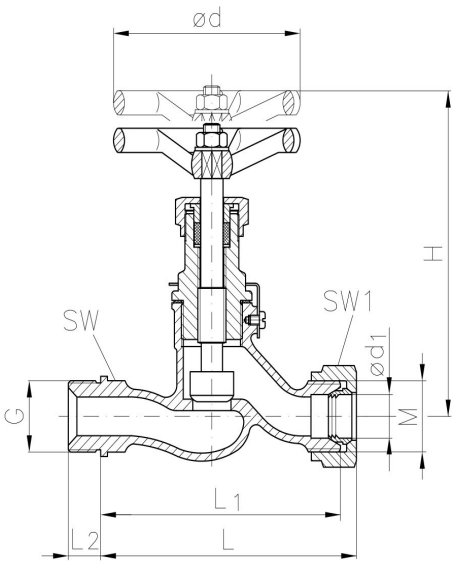

No.	DETAILS	MATERIALS
1	Body	bronze RG5
2	Interior details	brass Ms58
3	Seat seal	metal / metal

SPECIFICATION	
Standard	DIN 86512
Valve (type)	ARS-Rg-N; S
Valve (type)	reversible
Lid connection	threaded / secured against unscrewing
Execution	straight
Login	soldering ring
Exodus	soldering ring
Management	manually with wheel
Drive	multi-turn
Temp. range [°C]	-10°C ÷ 225°C

**CHECK VALVE - STOP STRAIGHT BRONZE WITH WELDED
RINGS CRS-RG-N; S / DIN86512 PN 40**

Material bronze CC491K; DIN RG5 / forged
Pressure PN 40

DN	Ød1	M	L	L1	H	Ød	SW	kg
6	10	1/2	67	60	110	60	17	0.5
8	12	5/8	71	64	110	60	19	0.5
10	14	3/4	78	70	110	60	24	0.5
12	16	7/8	93	84	130	80	24	1.0
16	20	1	100	90	130	80	24	1.1
20	25	1 1/8	121	110	150	100	30	1.7
25	30	1 3/8	132	120	150	100	41	1.9
32	38	1 3/4	154	140	180	120	-	3.0