

BRONZE ANGLE CHECK VALVE WITH WELDED RING DRS-RG-N; S / DIN86512 PN 40

Material bronze CC491K; DIN RG5 / forged
Pressure PN 40


TECHNICAL DESCRIPTION

They are used to transport water - hot and cold, oils, steam, neutral gases, seawater, fuels, air, etc.

IMPLEMENTATION AND OPTIONS

- according to DIN 86512-DRS-RG-S
- body with internal parts made of stainless steel or bronze
- other materials on request

Dimensions: DN 6 - 32

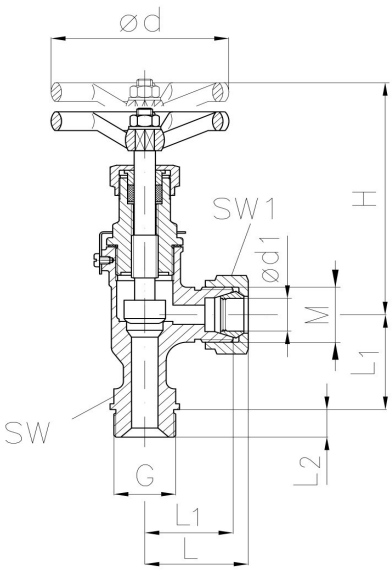

No.	DETAILS	MATERIALS
1	Body	bronze RG5
2	Interior details	brass Ms58
3	Seat seal	metal / metal

SPECIFICATION	
Standard	DIN 86502
Valve (type)	DRS-Rg-N; S
Valve (type)	reversible
Lid connection	threaded / secured against unscrewing
Execution	angular
Login	thread
Exodus	snap ring
Management	manually with wheel
Drive	multi-turn
Temp. range [°C]	-10°C ÷ 225°C

BRONZE ANGLE CHECK VALVE WITH WELDED RING DRS-RGN; S / DIN86512 PN 40

Material bronze CC491K; DIN RG5 / forged
Pressure PN 40

DN	Ød1	G	M	L	L1	L2	H	Ød	SW	SW1	kg
6	10	3/8	1/2	37	30	12	105	60	17	27	0.5
8	12	1/2	5/8	39	32	14	105	60	19	27	0.5
10	14	1/2	3/4	43	35	14	105	60	19	27	0.5
12	16	3/4	7/8	47	38	16	115	80	24	36	1.0
16	20	3/4	1	50	40	16	115	80	24	41	1.1
20	25	1	1 1/8	59	48	18	135	100	30	46	1.7
25	30	1 1/4	1 3/8	62	50	20	130	100	41	50	1.9
32	38	1 1/2	1 3/4	67	55	22	150	120	-	-	3.0