


NIPPLE TRANSITION ISO 7-1 TYPE BPH EN10241 TABLE 15

Material steel P265GH , A234WPB
Pressure 25 Bar

TECHNICAL DESCRIPTION

Internal reducer coupling (BRP) is a straight pipe coupling with internal and external threads, connecting straight pipe elements (pipes) with different external diameters.

Dimensions: G 3/8" - 1 1/2"

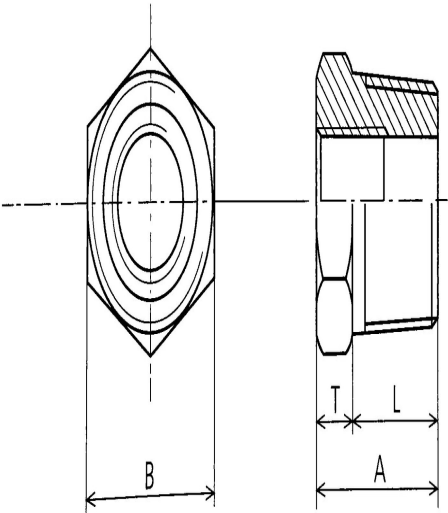

No.	DETAILS	MATERIALS	SPECIFICATION	
1	Internal reducer coupling - BPH	steel P265GH; A234 WPB	Standard	EN10241
		other steels - on request	Joining	threaded ISO 7-1
		stainless steels - upon request	Pressure	25 Bar

NIPPLE TRANSITION ISO 7-1 TYPE BPH EN10241 TABLE 15

Material steel P265GH , A234WPB

Pressure 25 Bar

DN	G	L	T	A	B
		mm	mm	mm	mm
10 x 6	3/8" x 1/8"	12.5	8	20.5	17
10x8	3/8" x 1/4"	12.5	8	20.5	17
15 x 8	1/2" x 1/4"	17.5	8	25.5	22
15x10	1/2" x 3/8"	17.5	8	25.5	22
20 x 8	3/4" x 1/4"	19.0	10	29.0	27
20x 10	3/4" x 3/8"	19.0	10	29.0	27
20 x 8	3/4" x 1/2"	19.0	10	29.0	27
20 x 8	1" x 3/8"	21.0	10	31.0	36
25 x 15	1" x 1/2"	21.0	10	31.0	36
25 x 8	1" x 3/4"	21.0	10	31.0	36
32 x 15	1 1/4" x 1/2"	24.0	11	35.0	46
32x20	1 1/4" x 3/4"	24.0	11	35.0	46
32 x 25	1 1/4" x 1"	24.0	11	35.0	46
40 x 15	1 1/2" x 1/2"	24.0	13	37.0	50
40x20	1 1/2" x 3/4"	24.0	13	37.0	50
40 x 25	1 1/2" x 1"	24.0	13	37.0	50
40x32	1 1/2" x 1 1/4"	24.0	13	37.0	50
50x25	2" x 1"	27.0	14	41.0	65
50x32	2" x 1 1/4"	27.0	14	41.0	65
50x40	2" x 1 1/2"	27.0	14	41.0	65