

CONDENSATE SEPARATOR THERMODYNAMIC FLANGE TLV AF3N

Material grey cast iron EN-JL1040
Pressure PN 16

TECHNICAL CHARACTERISTICS

Thermodynamic steam traps are very suitable for draining main steam lines, water traps. They have a large drainage capacity and are also a good choice for installation in narrow spaces, as they are small in size.

WORKING FLUID / MEDIUM


- Steam

EXECUTION

- TLV type AF3N (flange)

INSTALLATION INSTRUCTIONS

- In horizontal position

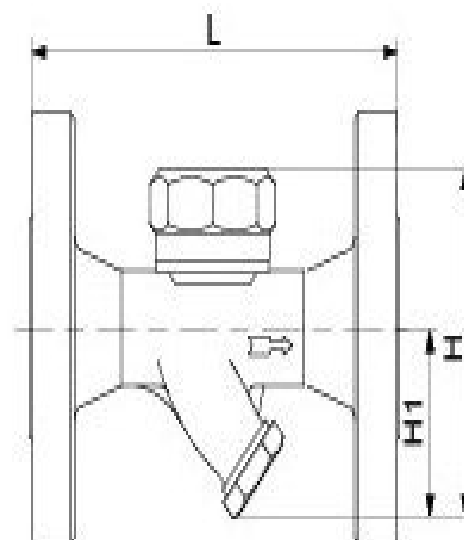

Dimensions: DN 15 - 25

No.	DETAILS	MATERIALS
1	Body	gray cast iron GG25
2	Interior details	stainless steel CF8M / 1.4408

SPECIFICATION	
Standard	DIN
Joining	flanged EN 1092-1
Lid connection	threaded
Execution	straight
Management	automatically
Venting	automatically
Installation	horizontal

**CONDENSATE SEPARATOR THERMODYNAMIC FLANGE TLV
AF3N**

Material grey cast iron EN-JL1040
Pressure PN 16

G	L	H	H1	Weight (kg)
15	175	120	67	3.4
20	191	125	71	5.0
25	211	131	73	6.2