

STRAIGHT BRONZE STOP VALVE WITH WELDED RINGS CS-RG- Material bronze CC491K; DIN RG5 / forged
N; S / DIN86511 PN 40

Pressure

PN 40


TECHNICAL DESCRIPTION

They are used to transport water - hot and cold, oils, steam, neutral gases, seawater, fuels, air, etc.

IMPLEMENTATION AND OPTIONS

- according to DIN 86511-AS-RG-S
- body with internal parts made of stainless steel or bronze
- other materials on request

Dimensions: DN 6 - 32

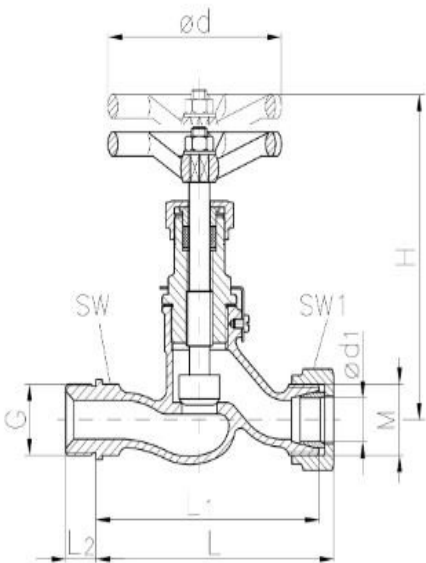

No.	DETAILS	MATERIALS
1	Body	bronze RG5
2	Interior details	brass Ms58
3	Seat seal	metal / metal

SPECIFICATION	
Standard	DIN 86511
Valve (type)	AS-Rg-N; S
Valve (type)	stopping
Lid connection	threaded / secured against unscrewing
Execution	straight
Login	thread
Exodus	soldering connection ring
Management	manually with wheel
Drive	multi-turn
Temp. range [°C]	-10°C ÷ 225°C

STRAIGHT BRONZE STOP VALVE WITH WELDED RINGS CS-RG- Material bronze CC491K; DIN RG5 / forged
N; S / DIN86511 PN 40 Pressure PN 40

DN	Ød1	M	L	L1	H	Ød	SW	kg
6	10	1/2	74	60	110	60	22	0.5
8	12	5/8	78	64	110	60	24	0.5
10	14	3/4	88	70	110	60	30	0.5
12	16	7/8	102	87	130	80	30	1.0
16	20	1	110	90	130	80	36	1.1
20	25	1 1/8	132	110	150	100	46	1.7
25	30	1 3/8	144	120	150	100	50	1.9
32	38	1 3/4	164	140	180	120	-	3.0