

STRAIGHT STEEL STOP VALVE WITH JOINT RING AS DIN86552
PN 100

Material steel 1.0619 / forged
Pressure PN 100


TECHNICAL DESCRIPTION

They are used to transport water – hot and cold, oils, steam, neutral gases, seawater, fuels, air, etc.

IMPLEMENTATION AND OPTIONS

- non-return valve according to DIN 86552-ASR

Dimensions: DN 6 - 32

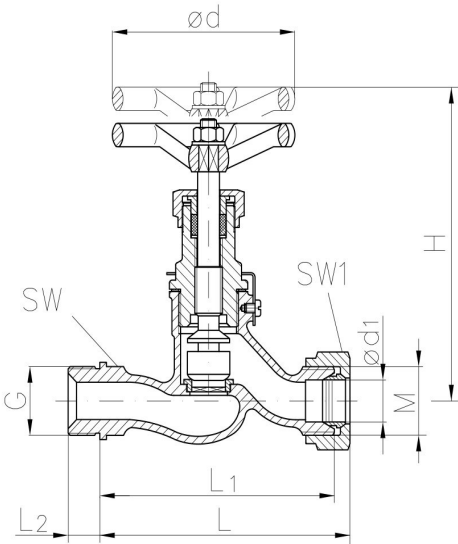

No.	DETAILS	MATERIALS
1	Body	steel
2	Interior details	stainless steel 1.4104
3	Seat seal	metal / metal

SPECIFICATION	
Standard	DIN 86552
Valve (type)	ARS
Valve (type)	reversible
Lid connection	threaded / secured against unscrewing
Execution	straight
Login	thread
Exodus	snap ring
Management	manually with wheel
Drive	multi-turn
Temp. range [°C]	-10°C to 300°C

STRAIGHT STEEL STOP VALVE WITH JOINT RING AS DIN86552 Material
PN 100 Pressure

steel 1.0619 / forged
 PN 100

DN	Ød1	G	M	L	L1	L2	H	Ød	SW	SW1	kg
6	10	3/8	M18x1.5	85	76	12	120	60	19	27	0.6
8	12	1/2	M20x1.5	85	76	14	120	60	19	27	0.6
10	14	1/2	M22x1.5	93	84	14	120	60	-	-	0.6
12	16	3/4	M24x1.5	106	96	16	135	80	30	36	1.0
16	20	3/4	M30x2	111	100	16	135	80	30	41	1.1
20	25	1	M36x2	133	120	18	160	100	36	46	1.8
25	30	1 1/4	M42x2	133	120	20	160	100	41	50	2.1