

STRAIGHT STEEL STOP VALVE WITH JOINT RINGS CS
DIN86552 PN 100

Material steel 1.0619 / forged
Pressure PN 100


TECHNICAL DESCRIPTION

They are used to transport water – hot and cold, oils, steam, neutral gases, seawater, fuels, air, etc.

IMPLEMENTATION AND OPTIONS

- non-return valve according to DIN 86551-CSR

Dimensions: DN 6 - 32

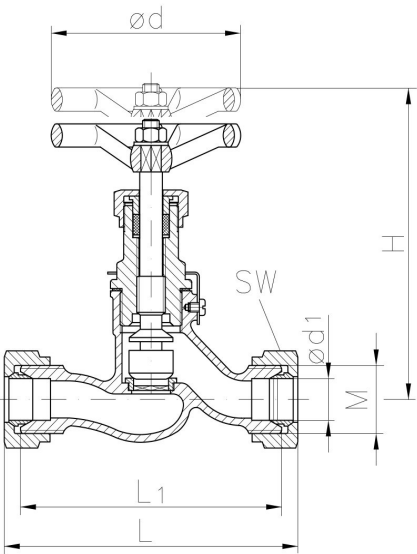

No.	DETAILS	MATERIALS
1	Body	steel
2	Interior details	stainless steel 1.4104
3	Seat seal	metal / metal

SPECIFICATION	
Standard	DIN 86552
Valve (type)	ARS
Valve (type)	reversible
Lid connection	threaded / secured against unscrewing
Execution	straight
Login	thread
Exodus	snap ring
Management	manually with wheel
Drive	multi-turn
Temp. range [°C]	-10°C to 300°C

**STRAIGHT STEEL STOP VALVE WITH JOINT RINGS CS
DIN86552 PN 100**

Material steel 1.0619 / forged
Pressure PN 100

DN	Ød1	M	L	L1	H	Ød	SW	kg
6	10	M18x1.5	94	76	120	60	19	0.6
8	12	M20x1.5	94	76	120	60	19	0.6
10	14	M22x1.5	98	84	120	60	-	0.6
12	16	M24x1.5	116	96	135	80	30	1.0
16	20	M30x2	122	100	135	80	30	1.1
20	25	M36x2	146	120	160	100	36	1.8
25	30	M42x2	146	120	160	100	41	2.1
32	38	M52x2	196	180	180	120	-	3.2