

**STEEL ANGLE STOP VALVE WITH WELDED END DS DIN86551
PN 100**

Material steel 1.0619 / forged
Pressure PN 100


TECHNICAL DESCRIPTION

They are used to transport water - hot and cold, oils, steam, neutral gases, seawater, fuels, air, etc.

IMPLEMENTATION AND OPTIONS

- non-return valve according to DIN 86511 type DRS

Dimensions: DN 6 - 32

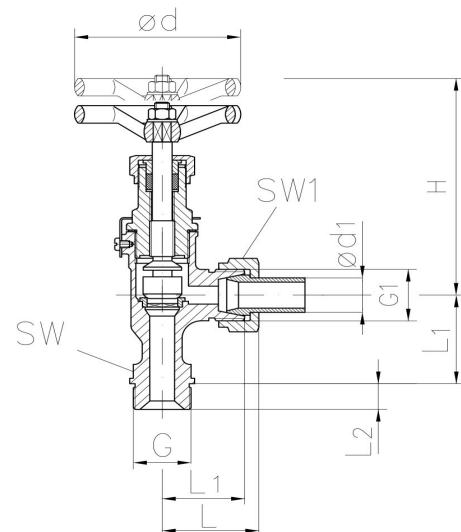

No.	DETAILS	MATERIALS
1	Body	steel
2	Interior details	stainless steel 1.4104
3	Seat seal	metal / metal

SPECIFICATION	
Standard	DIN 86511
Valve (type)	DS
Valve (type)	stopping
Lid connection	threaded / secured against unscrewing
Execution	angular
Login	thread
Exodus	welded sleeve
Management	manually with wheel
Drive	multi-turn
Temp. range [°C]	-10°C to 300°C

STEEL ANGLE STOP VALVE WITH WELDED END DS DIN86551
PN 100

Material steel 1.0619 / forged
 Pressure PN 100

DN	Ød1	G	G1	L	L1	L2	H	Ød	SW	SW1	kg
6	10	3/8	1/2	37	30	12	140	60	19	27	0.6
8	12	1/2	5/8	39	32	14	140	60	19	27	0.6
10	14	1/2	3/4	44	33	14	140	60	-	-	0.6
12	16	3/4	7/8	47	38	16	165	80	30	36	1.0
16	20	3/4	1	50	40	16	165	80	30	41	1.1
20	25	1	1 1/8	59	48	18	190	100	36	46	1.8
25	30	1 1/4	1 3/8	62	50	20	190	100	41	50	2.1