

THERMOSTATIC CONDENSATE TRAP WITH AIR BREATHER THREADED / FLANGED ADCA TH36

Material cast steel P250GH / 1.0432
Pressure PN 100

TECHNICAL DESCRIPTION

Thermostatic steam traps series TH36 for steam with automatic air venting are specially designed for installation in industrial equipment such as sterilizers, food processing equipment, chemical and laundry equipment, where high drainage capacity is required. Connection is threaded or flanged

WORKING FLUID MEDIUM

- Superheated steam

MODELS

- TH32/4 - 4 capsules
- TH32/6 - 6 capsules


OPTIONS

- Stainless steel construction

JOIN

- flanged EN 1092-1 / PN40 or ANSI
- threaded ISO 7 / 1 Rp (BS21)
- welded (on request)

Dimensions: 1 1/2" - 2" / DN 40 - 50

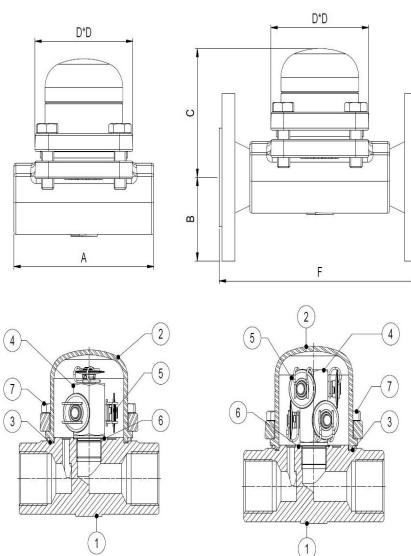

No.	DETAILS	MATERIALS	Standard	DIN/ANSI
1	Body	P250GH / 1.0460	Threaded connection	ISO 7 / 1 Rp (BS21)
2	Lid	P250GH / 1.0460	Flange connection	EN 1092-1 / PN40 or ANSI
3	Garnish	stainless steel/graphite	Welding socket	ANSI B 16.11
4	Valve	AISI 304 / 1.4301	Butt weld	ANSI B16.25
5	Thermostatic element	Stainless steel	Attaching the lid	bolted
6	Saddle-trim	copper	Execution	straight
7	Bolts	8.8	Management	automatically
			Venting	automatically

**THERMOSTATIC CONDENSATE TRAP WITH AIR BREATHER
THREADED / FLANGED ADCA TH36**

Material cast steel P250GH / 1.0432
Pressure PN 100

DIMENSIONS (mm)													
Threaded or welded					EN PN 16 / PN 40			ANSI 150			ANSI 300		
DN	A	C	D	kg	B	F	kg	B	F	kg	B	F	kg
40 - 1 1/2"	160	126	112	4.6	75	230	9.3	64	230	8.2	78	230	11.2
50 - 2"	230	126	112	5.8	83	230	10.2	76	230	10	83	230	11.6