

CHECK VALVE BRASS SPRING RETURN DIN PN 16

Material brass CW710R; DIN SoMs59

Pressure PN 16

TECHNICAL DESCRIPTION


Check valve, with soft sealing – Teflon PTFE / metal and threaded connection.

WORKING FLUID / MEDIUM

- Steam up to 120 °C, thermal oil, fuels, lubricating oil and flammable hydraulic oils, petroleum, boiler feed water, sea water.

EXECUTION

- Other materials upon request.

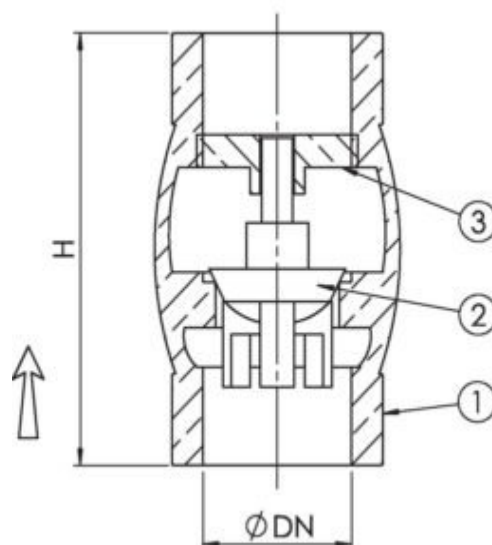

No.	DETAILS	MATERIALS
1	Body	brass CW710R; DIN SoMs59
2	Valve	brass CW710R; DIN SoMs59
3	Nut	brass CW710R; DIN SoMs59

SPECIFICATION	
Standard	DIN
Standard of accession.	BSPP
Lid connection	threaded
Execution	straight
Joining	threaded
Management	automatically
Drive	self-closing
T max. °C	120 °C

CHECK VALVE BRASS SPRING RETURN DIN PN 16

Material brass CW710R; DIN SoMs59

Pressure PN 16

DN	PN	Flanges/PN	H	Weight (kg)
15	16	G 1/2"	52	0.2
20	16	G 3/4"	55	0.4
25	16	G1"	59	0.6
32	16	G 1 1/4"	63	0.9
40	16	G 1 1/2"	71	1.3
50	16	G 2"	77	2
65	16	G 2 1/2"	96	3.5
80	16	G 3"	102	4
100	16	G 4"	120	5.4