

**CHECK VALVE BRASS HORIZONTAL INSTALLATION DIN 3202
PN 16**

Material brass CW710R; DIN SoMs59
Pressure PN 16

TECHNICAL DESCRIPTION

Check valve, with soft seal - PTFE / metal and threaded connection.


For installation in horizontal and vertical positions, where the fluid enters below the valve.

WORKING FLUID / MEDIUM

- Fuels, lubricating oil and flammable hydraulic oils, petroleum, boiler feed water, condensate.
- Sea water.

EXECUTION

- Other materials upon request.

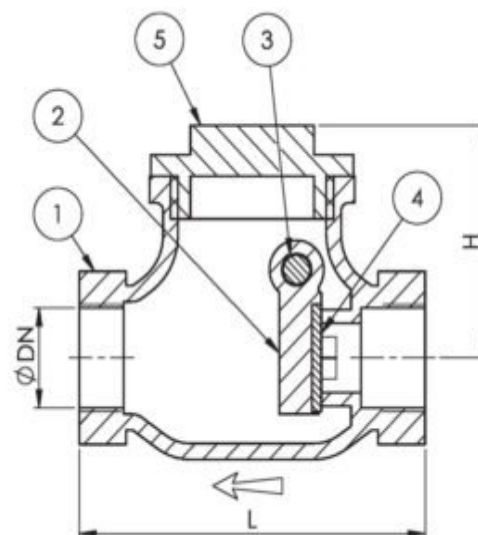

No.	DETAILS	MATERIALS
1	Body	brass CW710R; DIN SoMs59
2	Valve	brass CW710R; DIN SoMs59
3	Stem	brass CW710R; DIN SoMs59
4	Valve seal	Teflon/PTFE
5	Cover	brass CW710R; DIN SoMs59

SPECIFICATION	
Valve Standard	DIN
Connection standard	BSPP
Cover connection	threaded
Execution	straight
Connection	threaded
Operation	check valve
Drive	self-closing
T max. °C	120 °C

CHECK VALVE BRASS HORIZONTAL INSTALLATION DIN 3202
PN 16

Material brass CW710R; DIN SoMs59
 Pressure PN 16

DN	PN	Flanges/PN	L	H	Weight (kg)
15	16	G 1/2"	45	42	0.3
20	16	G 3/4"	53	46	0.5
25	16	G1"	63	49	0.7
32	16	G 1 1/4"	72	54	0.9
40	16	G 1 1/2"	80	59	1.2
50	16	G 2"	91	67	1.8
65	16	G 2 1/2"	120	105	3.5
80	16	G 3"	135	125	5
100	16	G 4"	164	130	5