

WAFER CHECK VALVE STAINLESS STEEL TYPE W409 DIN PN 40

Material stainless steel 1.4301; AISI 304
Pressure PN 25

TECHNICAL DESCRIPTION

Stainless steel wafer check valve for installation between connecting flanges, soft sealing PN40.

WORKING FLUID / MEDIUM


- Corrosive fluids, steam, thermal oil, fuel, lubricating oil and flammable hydraulic oils.
- Oil, air, gas, non-flammable hydraulic fluids, boiler feed water, condensate.
- Sea water.

EXECUTION

- NBR O-ring (-40°C to +90°C)
- EPDM O-ring (-40°C to +120°C)
- Teflon - PTFE O-ring (-50°C to +220°C)
- FPM/FKM O-ring (-30°C to +180°C).

OPTIONS

Larger sizes upon request.

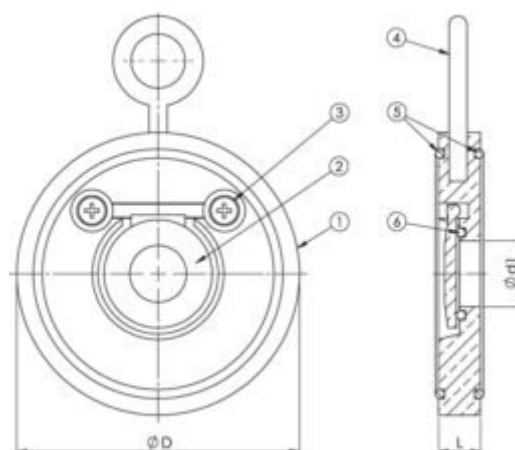

SPECIFICATION		
1	Body	stainless steel 1.4301; 1.4401
2	Valve	stainless steel 1.4301; 1.4401
3	Bolt	stainless steel 1.4301
4	Schegel	stainless steel 1.4301
5	O-ring	rubber, PTFE
Standard		DIN, ANSI, JIS
Connection		between flanges / Wafer
Operation		automatically
Closing		self-closing
T max. °C		220 °C

WAFER CHECK VALVE STAINLESS STEEL TYPE W409 DIN PN 40

Material stainless steel 1.4301; AISI 304
Pressure PN 25

DN	PN	Фланци/PN	L	d1	D	Тегло (kg)
40	40	40	14	22	94	0,9
50	40	40	14	32	109	1,2
65	40	40	14	40	129	1,5
80	40	40	14	54	144	2,5
100	40	40	18	70	170	3,5
125	40	40	18	92	196	5
150	40	40	20	112	226	5,5
200	40	40	22	154	286	8
250	40	40	26	200	343	15
300	40	40	32	240	403	24
350	40	40	38	270	460	39
400	40	40	44	310	520	59
450	40	40	50	360	567	70
500	40	40	56	405	622	90