

PLATE FLANGE TYPE 01/B1 EN1092-1 PN40


Material	steel EN P245GH
Pressure	PN 40

TECHNICAL DESCRIPTION

Flat flanges according to standard EN1092-1 / type 01 / B1 are pipeline elements with a wide size range, which are widely used in the construction of steel pipelines and pipe segments (spools) used in industry, industry, shipbuilding and ship repair.

We stock flat steel flanges according to EN1092-1 type 01 / with sealing surface B1, but we also have the necessary machining equipment, which allows us to offer flanges with sealing surfaces.

- sealing surface type A, B2, C, D, E, F
- non-standard sealing surfaces on request
- profile grooves for metal sealing rings (segments) type RTJ
- threaded type flanges
- flanges made to customer specifications, and others.

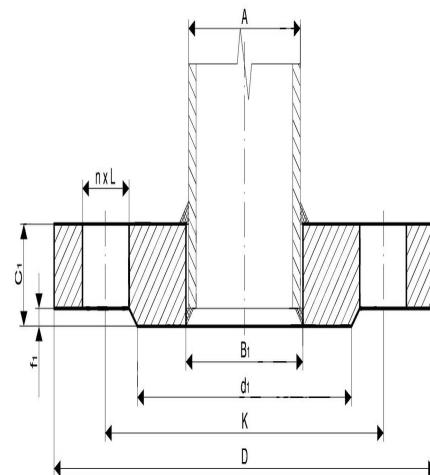

SUPPORTED MATERIALS IN STOCK:

- Carbon steel

P245GH (1.0352) / EN 10222-2

Dimensions: DN 10 - 600

PLATE FLANGE TYPE 01/B1 EN1092-1 PN40

Material steel EN P245GH
Pressure PN 40

No.	DETAILS	MATERIALS	STANDARD
1	FLAT FLANGE 01/B1 EN1092-1 PN40	steel P245GH / (1.0352)	EN 10222-2
	other steels - on request		
		P245GH / 1.0352	EN 10222-2
		P265GH / 1.0425	EN 10028-2
		P280GH / 1.0426	EN 10222-2
		P355NL1 / 1.0566	EN 10028-3
		16Mo3; 15Mo3 / 1.5415	EN 10222-2
	other stainless steels - on request		
		AISI 304L (X2CrNiMo17-12-2) / 1.4404	EN 10222-5
		AISI 316L (X2CrNiMo17-12-2) / 1.4404	EN 10222-5
		AISI 321 (X6CrNiTi18- 10) / 1.4541	EN 10222-5
		AISI 316Ti (X6CrNiMoTi17-12-2) / 1.4571	EN 10222-5

SPECIFICATION	
Standard	EN 1092-1 01/B1
Pressure	PN 40

PLATE FLANGE TYPE 01/B1 EN1092-1 PN40

Material

steel EN P245GH

Pressure

PN 40

DN	pipe Ø	flange dimensions								fastener dimensions	
	A	B1	D	K	d1	f1	C1	L	Kg	n	M
10	13.5*	14	90	60	40	2	14	14	0.62	4	M12
	17.2	18							0.60		
15	20.0*	20.5	95	65	45	2	14	14	0.69	4	M12
	21.3	22.0							0.67		
20	25.0*	26	105	75	58	2	16	14	0.95	4	M12
	26.9	27.5							0.94		
25	30.0*	32	115	85	68	2	16	14	1.13	4	M12
	33.7	34.5							1.11		
32	38.0*	39	140	100	78	2	18	18	1.84	4	M16
	42.4	43.5							1.82		
40	44.5*	45.5	150	110	88	3	18	18	2.10	4	M16
	48.3	49.5							2.08		
50	57.0*	58	165	125	102	3	20	18	2.75	4	M16
	60.3	61.5							2.73		
65	76.1	77.5	185	145	122	3	22	18	3.48	8	M16
80	88.9	90.5	200	160	138	3	24	18	4.32		M16
100	108.0*	109	235	190	162	3	26	22	6.10	8	M20
	114.3	116							6.07		
125	133.0*	135	270	220	188	3	28	26	8.21	8	M24
	139.7	141.5							8.19		
150	159.0*	161	300	250	218	3	30	26	10.50	8	M24
	168.3	170.5							10.30		
200	219.1	221.5	375	320	285	3	36	30	17.90	12	M27
250	273.0	276.5	450	385	345	3	42	33	29.30	12	M30
300	323.9	327.5	515	450	410		52	33	45.10	16	M30
350	355.6	359.5	580	510	465	4	58	36	66.70	16	M33
400	406.4	411	660	585	535	4	65	39	97.10	16	M36
450	457.0	462	685	610	560	4	*	39	-	20	M36
500	508.0	513.5	755	670	615	4	*	42	-	20	M39
600	610.0	616.5	890	795	735	5	*	48	-	20	M45
diameters not specified in standard EN 1092-1:2013 - can be made to order											