

SAFETY VALVE STEEL FULL-LIFT FLANGED DIN

Material	cast steel 1.0619
Pressure	PN 16-40

TECHNICAL DESCRIPTION

Automatic full-lift safety valve, preventing critical pressure build-up in the system. Maximum unloading when reaching the set operating pressure. Full opening, at 5% overpressure from the valve setting. When ordering a valve, please inform us of your requirements regarding valve capacity, fluid type, operating temperature, inlet size and the type of system in which it will be used.

ANNEX

- Saturated steam boilers, steam superheaters and steam preheaters, compressed air processing and storage installations.
- Thermal oil boilers, installations operating at high flow rates and chemical reactions involving exothermic processes.
- LPG gas storage installations


WORKING FLUID / MEDIUM

- Steam, water and technical gases.
- Thermal oil, fuels, lubricating oils and flammable hydraulic oils, petroleum, air, gas, non-flammable hydraulic fluids, boiler feed water, condensate.
- Propane butane LPG gas.

OPTIONS

- Open lid with a forced opening handle.

Dimensions: DN 20 - 200

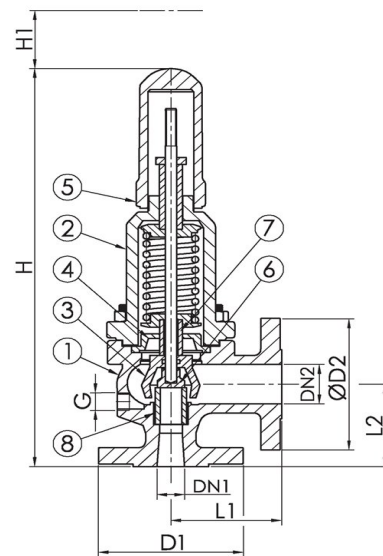

SAFETY VALVE STEEL FULL-LIFT FLANGED DIN

Material cast steel 1.0619
Pressure PN 16-40

No.	DETAILS	MATERIALS
1	Body	steel EN 1.0619
2	Spring cover	steel EN 1.0619
3.1	Lifter DN25x40 to 200x300	steel EN 1.0619
3.2	Lifter DN 20x32	stainless steel 1.4408 (AISI316)
4	Driver	stainless steel 1.4028 (AISI420)
5	Cap	steel EN 1.0619
6	Valve	stainless steel 1.4028 (AISI420)
7	Separator	stainless steel 1.4028 (AISI420)
8	Saddle	stainless steel 1.4028 (AISI420)

SPECIFICATION	
Standard	DIN
Joining	flanged EN 1092-2
Lid connection	bolted
Execution	angular

SAFETY VALVE STEEL FULL-LIFT FLANGED DIN

Material cast steel 1.0619
Pressure PN 16-40

DN / input	DN / outlet	G	D1	D2	L1	L2	H	H1	Weight (kg)
DN 20 / Rn 40	DN 32 / Rn 40	1/4"	105	140	85	95	350	112	8.1
DN 25 / Rn 40	DN 40 / Rn 40	1/4"	115	150	95	105	395	129	10
DN 32 / Rn 40	DN 50 / Rn 40	1/4"	140	165	100	110	415	129	14
DN 40 / Rn 40	DN 65 / Rn 40	1/4"	150	185	115	130	500	148	20
DN 50 / Rn 40	DN 80 / Rn 40	1/4"	165	200	125	145	555	148	27
DN 65 / Rn 40	DN 100 / Rn 16	3/8"	185	220	140	150	660	191	39
DN 80 / Rn 40	DN 125 / Rn 16	3/8"	200	250	155	170	710	191	56
DN 100 / Rn 16	DN 150 / Rn 16	3/8"	235	285	175	180	810	191	83
DN 125 / Rn 16	DN 200 / Rn 16	1/2"	270	340	215	220	858	191	103
DN 150 / Rn 16	DN 250 / Rn 10	1/2"	300	395	225	245	1029	247	149
DN 200 / Rn 16	DN 300 / Rn 10	1/2"	360	445	265	290	1252	331	244