

SWING CHECK STAINLESS STEEL VALVE THREADED DIN PN 40 Material stainless steel 1.4408; AISI 316
Pressure PN 40

TECHNICAL DESCRIPTION

Check valve with metal/metal seal, threaded with threaded cover.

WORKING FLUID / MEDIUM


- Fuels, lubricating oil and flammable hydraulic oils, boiler feed water, condensate.
- Sea water.

EXECUTION

- Other materials upon request.

OPTIONS

- Larger sizes upon request.

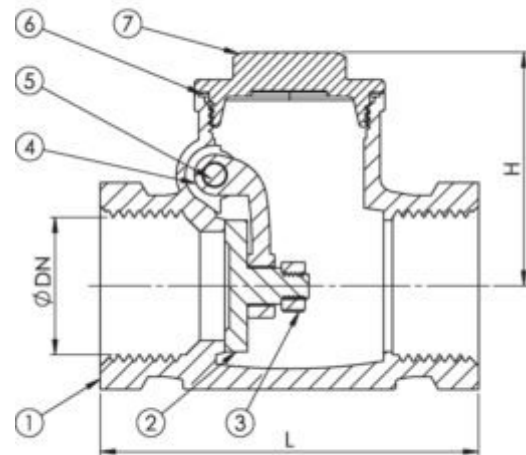

SPECIFICATION		
Standard	DIN	
Compound standard	NPT	
Lid connection	threaded	
Execution	straight	
Joining	threaded	
Operation	automatically	
Actuation	self-closing	
T max. °C	200 °C	

No.	DETAILS	MATERIALS
1	Body	stainless steel 1.4301 (AISI 304)
2	Valve	stainless steel 1.4301 (AISI 304)
3	Valve nut	A2
4	Pin	stainless steel 1.4401 (AISI AISI 316)
5	Axis	stainless steel 1.4401 (AISI AISI 316)
6	Cover gasket	Teflon / PTFE
7	Cover	stainless steel 1.4401 (AISI316)

SWING CHECK STAINLESS STEEL VALVE THREADED DIN PN 40 Material stainless steel 1.4408; AISI 316
Pressure PN 40

DN	PN	Flanges/PN	L	H	Weight (kg)
15	16	G 1/2"	60	42	0.3
20	16	G 3/4"	78	46	0.5
25	16	G1"	84	49	0.7
32	16	G 1 1/4"	94	54	0.9
40	16	G 1 1/2"	104	59	1.2
50	16	G 2"	122	67	1.8
65	16	G 2 1/2"	153	105	3.5
80	16	G 3"	175	125	5