

STAINLESS STEEL BALL VALVE FOR WELDING (SW) 3-PIECE • Material stainless steel 1.4408; AISI 316
DIN PN 25 Pressure PN 25

TECHNICAL DESCRIPTION

Ball valves are mainly used as shut-off elements in fluid transfer systems where high permeability is required. • Activated by turning 90°.

- Full passability.
- Body of three parts connected to each other by a bolted connection.
- Spindle - antistatic.

WORKING FLUID / MEDIUM


- Water, steam, corrosive fluids, fuels, lubricating and hydraulic oils, petroleum, air, gas, non-flammable hydraulic fluids.
- Boiler feed water, condensate.
- Sea water.

EXECUTION

- Various materials on request.

OPTIONS

- Butt Weld ends.
- Socket Weld ends.

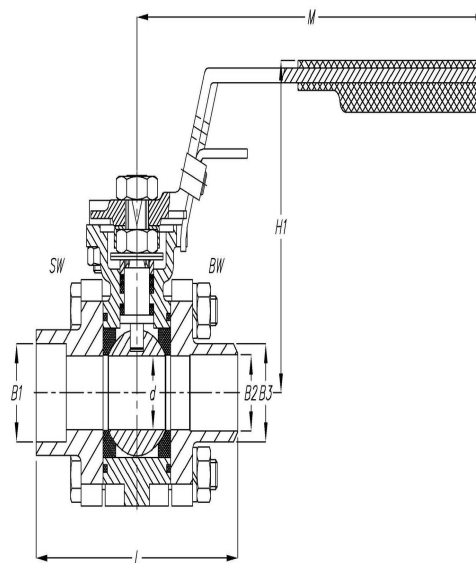

Dimensions: DN 32 - 50

DETAILS		SPECIFICATION	
Body	stainless steel 1.4301 (AISI304)	Standard	DIN 3202 F1
Lid	stainless steel 1.4301 (AISI304)	Joining	EN 1092-2
Sphere	stainless steel 1.4301 (AISI304)	Construction length	EN 558, series 1
Saddle	Teflon/PTFE	Execution	straight
Spindle	stainless steel 1.4408 (AISI316)	Joining	welded socket DIN3239-2
		Management	with handle
		Drive	sector 90°
		T max. °C	170 °C

STAINLESS STEEL BALL VALVE FOR WELDING (SW) 3-PIECE • Material stainless steel 1.4408; AISI 316
DIN PN 25 Pressure PN 25

DN		d	H	F	H1	L	Butt weld reducing passage		Butt weld full pass		Welding socket		M	
Reducing passage	Full pass	[mm]					B3 [mm]	B2 [mm]	B3 [mm]	B2 [mm]	Reduc. passage B1 [mm]	Full bore B1 [mm]	[mm]	[kg]
1 ½"	1 ¼"	31.8	61	22	110	118	48.3	40.9	42.2	35.1	49	43	205	3.2
2"	1 ½"	38.1	65	22	115	130	60.3	52.5	48.3	40.9	61.1	49	205	4.2
2 ½"	2"	50.8	80	25	130	142	76.1	68.9	60.3	52.5	77.1	61.1	205	6.3