

BALL VALVE STAINLESS THREADED 3-PIECE • DIN PN 25

Material stainless steel 1.4408; AISI 316
Pressure PN 25

TECHNICAL DESCRIPTION

Ball valves are mainly used as shut-off elements in fluid transfer systems where high permeability is required.

- Operated by turning 90°.
- Full flow.
- Body in three parts connected by bolted connection.
- Spindle – secured against knocking out.
- Threaded connection – NPT

WORKING FLUID / MEDIUM

- Water, steam, corrosive fluids, fuels, lubricating and hydraulic oils, petroleum, air, gas, non-flammable hydraulic fluids.
- Boiler feed water, condensate.
- Sea water.


EXECUTION

- Various materials on request.

OPTIONS

- Discharge opening of the sphere

Dimensions: 1 1/4" - 2 1/2"

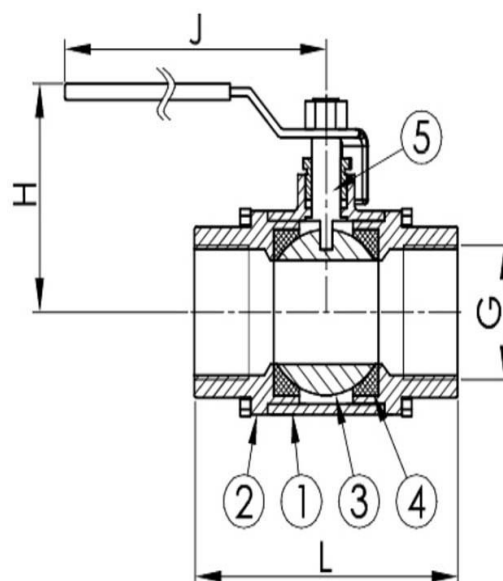

			SPECIFICATION	
No.	DETAILS	MATERIALS		
1	Body	stainless steel 1.4408 (AISI316)	Standard	DIN 3202 F1
2	Lid	stainless steel 1.4408 (AISI316)	Thread standard	ISO 228-1. BSPP
3	Sphere	stainless steel 1.4408 (AISI316)	Construction length	EN 558, series 1
4	Saddle	Teflon/PTFE	Execution	straight
5	Spindle	stainless steel 1.4408 (AISI316)	Joining	threaded
			Management	with handle
			Drive	sectoral
			T max. °C	170 °C

BALL VALVE STAINLESS THREADED 3-PIECE • DIN PN 25

Material stainless steel 1.4408; AISI 316

Pressure PN 25

DN	PN	Thread/BSP	L	H	J	Weight (kg)
32	25	G 1 1/4"	110	83	155	1.8
40	25	G 1 1/2"	120	98	192	2.5
50	25	G 2"	140	105	192	3.7
65	25	G 2 1/2"	185	148	257	8.1