

THREADED STEEL BALL VALVE 3-PIECE • DIN PN 25

Material 1.0619; DIN GS-C25
Pressure PN 25

TECHNICAL DESCRIPTION

Ball valves are mainly used as shut-off elements in fluid transfer systems where high permeability is required.

- Operated by turning 90°.
- Full passage.
- Body of three parts connected together by bolted connection.
- Drive flange ISO 5211.
- Spindle - antistatic.

WORKING FLUID / MEDIUM

- Water, steam, fuels, lubricating and hydraulic oils, petroleum, air, gas, non-flammable hydraulic fluids.
- Boiler feed water, condensate.
- Sea water.


EXECUTION

- Various materials on request

OPTIONS

- Discharge opening on the sphere.

Dimensions: G 1 1/4" - 2 1/2"

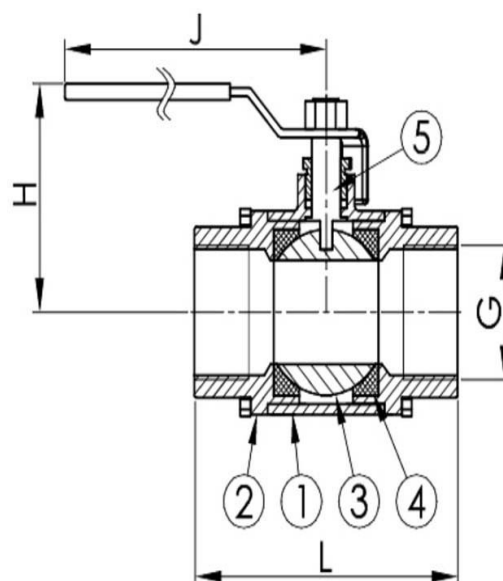

			SPECIFICATION	
No.	DETAILS	MATERIALS		
1	Body	carbon steel 1.0619; DIN GS-C25;	Standard	DIN 3202 F1
2	Lid	stainless steel 1.4408 (AISI316)	Joining Standard	ISO 228-1. BSPP
3	Sphere	stainless steel 1.4408 (AISI316)	Construction length	EN 558, series 1
4	Saddle	Teflon/PTFE	Execution	straight
5	Spindle	stainless steel 1.4408 (AISI316)	Joining	threaded/F (female)
			Management	with handle
			Drive	sectoral
			T max. °C	170 °C

THREADED STEEL BALL VALVE 3-PIECE • DIN PN 25

Material 1.0619; DIN GS-C25
Pressure PN 25

DN	PN	Thread / G" BSP	L	H	J	Weight (kg)
32	25	G 1 1/4"	110	83	155	1.8
40	25	G 1 1/2"	120	98	192	2.5
50	25	G 2"	140	105	192	3.7
65	25	G 2 1/2"	185	148	257	8.1