

GATE VALVE JIS 5K JIS F7400 CAST IRON WITH NON RISING STEM AND POSITION INDICATOR

Material cast iron EN-JL1040; DIN GG25
Pressure 5K

TECHNICAL CHARACTERISTICS


Cast iron gate valve according to JIS, suitable for use in systems with operating pressure up to 5 bar, flange connection according to JIS B2220 5K, with submersible spindle.

WORKING FLUIDS / MEDIUM

- Water, low pressure steam up to 5 bar, fuels, oils, seawater.

TECHNICAL ADVANTAGES

- Position indicator

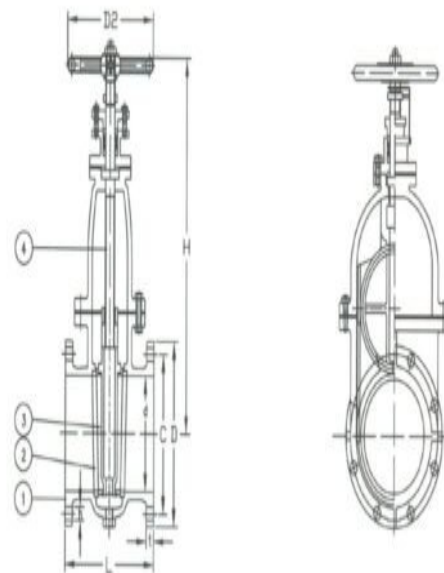

Dimensions: DN 50 - 300

SPECIFICATION		
Standard:	JIS F7400	
Connection:	JIS B2239 5K	
Construction length:	JIS F7425 (JIS F7363)	
Attaching cover:	bolted	
Execution:	straight	
Connection type:	flanged	
Actuation:	flywheel	
Operation:	multi-turn	
T max. at 7 Bar	120 °C	
T max. at 5 Bar	205 °C	

No.	DETAILS	MATERIALS
1	Body	cast iron EN-GJL200 (GG20, FC200)
2	Seat	CuSn5Zn5Pb5-C, RG5, CAC406, BC6 (bronze)
3	Wedge	grey cast iron EN-GJL200 (GG20, FC200)
4	Stem	CuZn40Pb2, Ms58, C3771BD

**GATE VALVE JIS 5K JIS F7400 CAST IRON WITH NON RISING
STEM AND POSITION INDICATOR**

Material cast iron EN-JL1040; DIN GG25
Pressure 5K

DN	PN	Flanges / Rn	L	D	C	nx Ød	H	D2	kg
50	5K	5K	180	130	105	4x15	270	140	13
65	5K	5K	190	155	130	4x15	295	160	19
80	5K	5K	200	180	145	4x19	325	160	24
100	5K	5K	230	200	165	8x19	360	200	35
125	5K	5K	250	235	200	8x19	450	200	48
150	5K	5K	270	265	230	8x19	500	200	65
200	5K	5K	290	320	260	8x23	620	250	103
250	5K	5K	330	385	280	12x23	730	315	164
300	5K	5K	370	430	345	12x23	845	315	236