

GATE VALVE JIS 10K JIS F7400 CAST IRON WITH NON RISING STEM AND POSITION INDICATOR

Material cast iron EN-JL1040; DIN GG25
Pressure 10K

TECHNICAL CHARACTERISTICS


Cast iron gate valve according to JIS, suitable for use in systems with operating pressure up to 10 bar, flange connection according to JIS B2220 10K, with submersible spindle.

WORKING FLUIDS / MEDIUM

- Water, low pressure steam up to 10 bar, fuels, oils, seawater.

TECHNICAL ADVANTAGES

- Position indicator

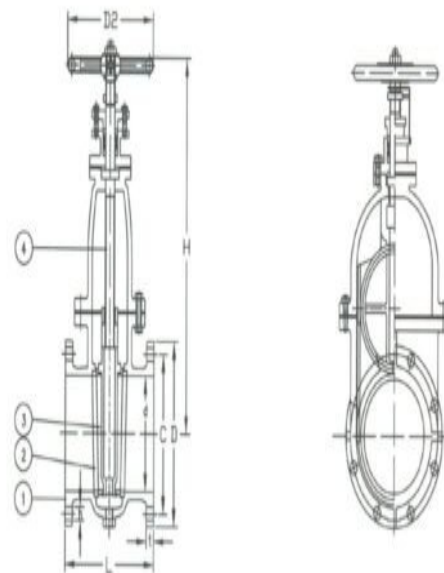

Dimensions: DN 50 - 300

			SPECIFICATION	
No.	DETAILS	MATERIALS	Standard:	JIS F7400
1	Body	cast iron EN-GJL200 (GG20, FC200)	Connection:	JIS B2239 5K
			Construction length:	JIS F7425 (JIS F7363)
2	Seat	CuSn5Zn5Pb5-C, RG5, CAC406, BC6 (bronze)	Attaching cover:	bolted
			Execution:	straight
3	Wedge	grey cast iron EN-GJL200 (GG20, FC200)	Connection type:	flanged
			Actuation:	flywheel
4	Stem	CuZn40Pb2, Ms58, C3771BD	Operation:	multi-turn
			T max. at 7 Bar	120 °C
			T max. at 5 Bar	205 °C

**GATE VALVE JIS 10K JIS F7400 CAST IRON WITH NON RISING
STEM AND POSITION INDICATOR**

Material cast iron EN-JL1040; DIN GG25
Pressure 10K

DN	PN	Flanges / Rn	L	D	C	nx Ød	H	D2	kg
50	10K	10K	200	155	120	4x19	270	140	19
65	10K	10K	220	175	140	4x19	295	160	28
80	10K	10K	230	185	150	8x19	325	160	33
100	10K	10K	250	210	175	8x19	360	200	46
125	10K	10K	270	250	210	8x23	450	200	66
150	10K	10K	290	280	240	8x23	500	200	86
200	10K	10K	320	330	290	12x23	560	200	136
250	10K	10K	380	400	355	12x25	620	250	230
300	10K	10K	440	445	400	16x25	730	315	331