

FORGED GATE VALVE CARBON STEEL WITH RISING STEM SW /Material
800 LBS Pressure


1.0619; DIN GS-C25
800 Lbs

TECHNICAL CHARACTERISTICS

Gate valves are primarily intended to stop the flow of fluid. The valve is closed by turning the handwheel clockwise. It is not recommended to use tools to increase the torque of the handwheel during closing and opening of the wedge. The gate valve can only be used in the fully open or closed position. The specified gate valve is not used for flow regulation.

WORKING FLUID / MEDIUM

Steam, water, thermal oil, fuels, lubricating and combustible hydraulic oils, petroleum, air, gas, non-combustible hydraulic fluids, boiler feed water, condensate, seawater.

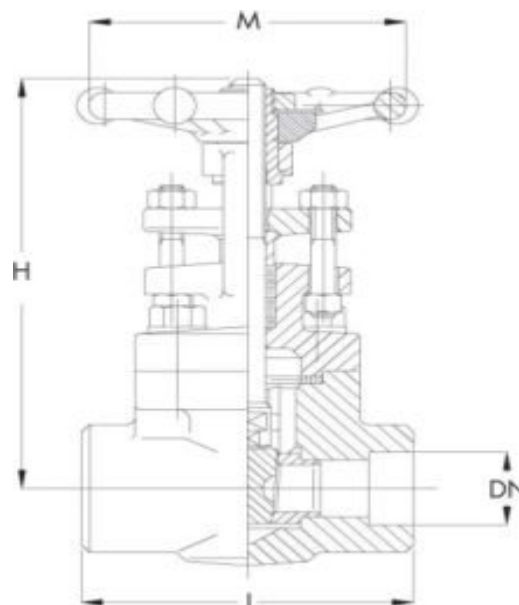

Dimensions: DN 10 - 50

No.	DETAILS	MATERIALS
1	Body	forged steel ASTM A105N
2	Cover	forged steel ASTM A105N
3	Wedge	ASTM A479 410
4	Seat	ASTM A 479 410 + stellite
5	Stem	ASTM A479 410
6	Cover	stainless steel 304 + graphite filling
7	Stem seal	graphite packing
8	Flywheel	steel

SPECIFICATION	
Standard	ANSI, API 602 - ASME B16.34 - BS 5352
Internal parts	Trim #8
Construction length	factory standard
Cover connection	bolted
Execution	straight
Connection	welded socket / ANSI B16.11
Operation	manually with wheel
Drive	multi-turn
T max. °C	426 °C

FORGED GATE VALVE CARBON STEEL WITH RISING STEM SW /Material
800 LBS Pressure

1.0619; DIN GS-C25
 800 Lbs

DN	PN	Flanges/PN	L	H (open)	M	Weight (kg)
Inch	LBS					
1/4"	800 lbs	socket weld	83	160	102	1.2
3/8"	800 lbs	socket weld	83	160	102	1.2
1/2"	800 lbs	socket weld	83	160	102	1.7
3/4"	800 lbs	socket weld	89	165	102	2.0
1"	800 lbs	socket weld	98	184	102	2.8
1 1/2"	800 lbs	socket weld	121	232	140	5.4
2"	800 lbs	socket weld	140	281	168	9.3