

SEAMLESS STEEL BW EN10253-2 TRANSITIONS

Material steel P265GH , A234WPB


TECHNICAL DESCRIPTION

Transitions are connecting elements with a specific diameter at both ends, which are used to connect pipes of different diameters.

EXECUTION

- Concentric
- Eccentric

Dimensions:Ø 21.3 - 508.0

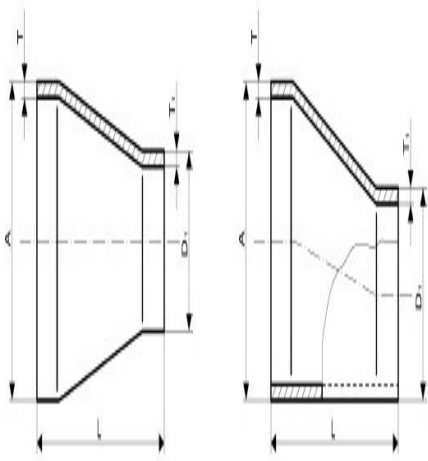

No.	DETAILS	MATERIALS	SPECIFICATION	
1	Transition	steel P265GH / A234 WPB	Standard	EN 10253-2
		other steels - on request		
		stainless steels - upon request		

SEAMLESS STEEL BW EN10253-2 TRANSITIONS

Material steel P265GH , A234WPB

dimensions (mm)							
DN input	A	T	DN output	D1	T1	kg	L
20	26.9	2.3	15	21.3	2	0.05	38
25	33.7	2.6	15	21.3	2	0.1	51
			20	26.9	2.3	0.1	
			15	21.3	2	0.15	
32	42.4	2.6	20	26.9	2.3	0.13	51
			25	33.7	Z6	0.13	
			20	26.9	2.3	0.21	
40	48.3	2.6	25	33.7	2.6	0.21	64
			32	42.4	Z6	0.21	
			25	33.7	2.6	0.37	
50	60.3	2.9	32	42.4	Z6	0.34	76
			40	48.3	Z6	0.34	
			32	42.4	Z6	0.53	
65	76.1	2.9	40	48.3	2.6	0.5	89
			50	60.3	2.9	0.47	
			40	48.3	2.6	0.68	
80	88.9	3.2	50	60.3	2.9	0.64	89
			65	76.1	2.9	0.64	
			50	60.3	2.9	1.1	
100	114.3	3.6	65	76.1	2.3	1.1	102
			80	88.9	3.2	1	
			65	76.1	2.9	1.9	
125	139.7	4	80	88.9	3.2	1.9	127
			100	114.3	3.6	1.8	
			80	88.9	3.2	2.95	
150	168.3	4.5	100	114.3	3.6	2.86	140
			125	139.7	4	2.86	
			100	114.3	3.6	6	
200	219.1	6.3	125	139.7	4	5.8	152
			150	168.3	4.5	5.4	
			125	139.7	4	8.4	
250	273	6.3	150	168.3	4.5	8	178
			200	219.1	6.3	7.6	
			150	168.3	4.5	12.5	
300	323.9	7.1	200	219.1	6.3	12	203
			250	273	6.3	11.4	
			200	219.1	6.3	22.6	
350	355.6	8	250	273	6.3	22.6	330
ИНКОВЕС ЕООД промишлена спирателна и регулираща арматура				300	323.9	7.1	22.6
тел.: 052 725 370, 371, 372	моб.: 0886 400 992	Адрес: Централен офис – складова база		250	273	6.3	30.6
факс.: 052 511 246	e-mail: office@incoves.com	Варна, Западна промишлена зона, ул. Перун 1					

SEAMLESS STEEL BW EN10253-2 TRANSITIONS

Material steel P265GH , A234WPB

dimensions (mm)							
DN input	A	T	DN output	D1	T1	kg	L
400	406.4	8.8	300	323.9	7.1	30.6	356
			350	355.6	8	30.6	